



Further
Information




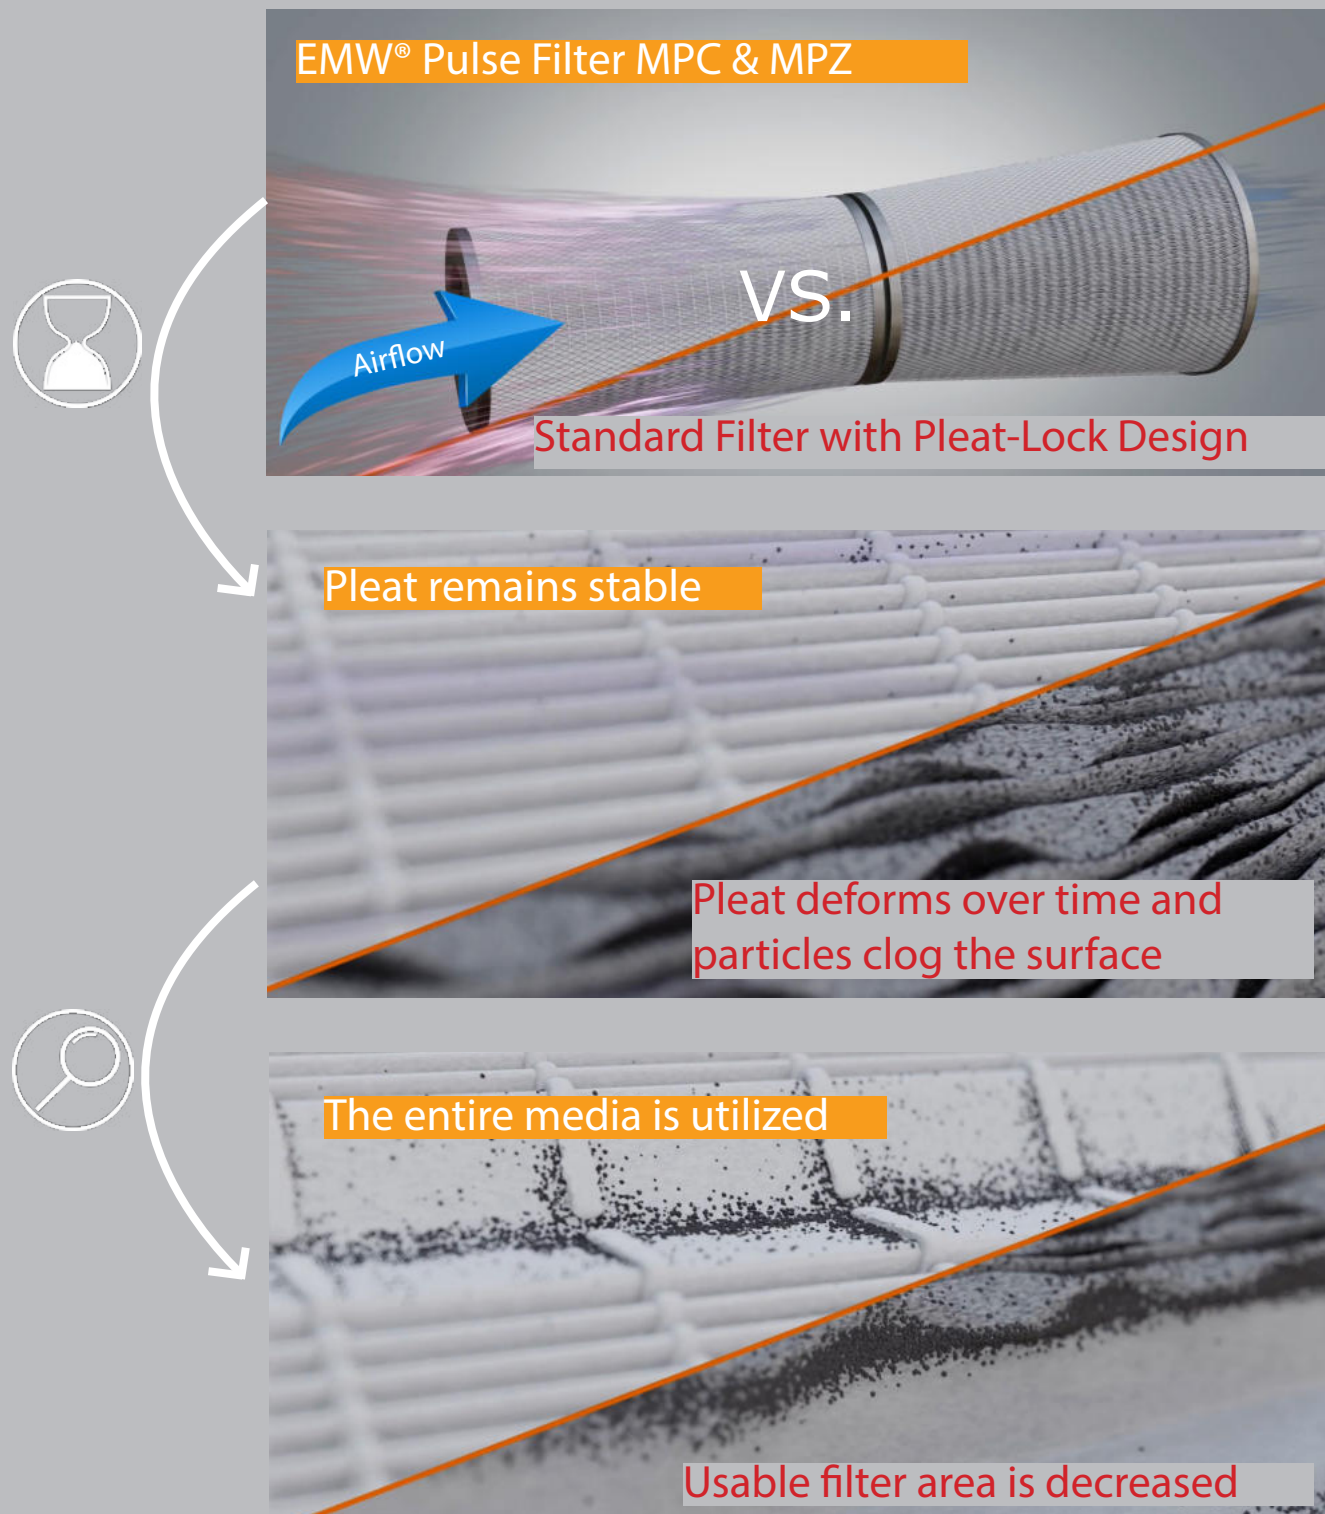


EMW's Pulse Filters:
Engineered for Sta-
bility with Innovative
Pleat Design.


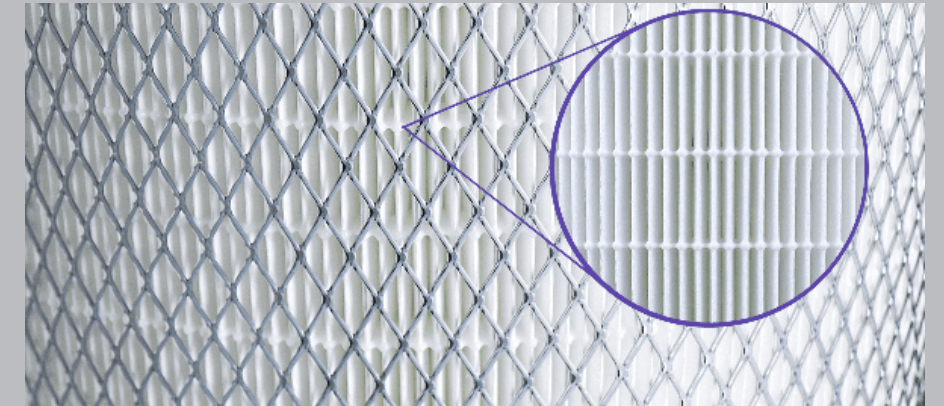


EMW's Pleat Design
after usage: As Sta-
ble as a Fresh-Out-
of-the-Box Filter.

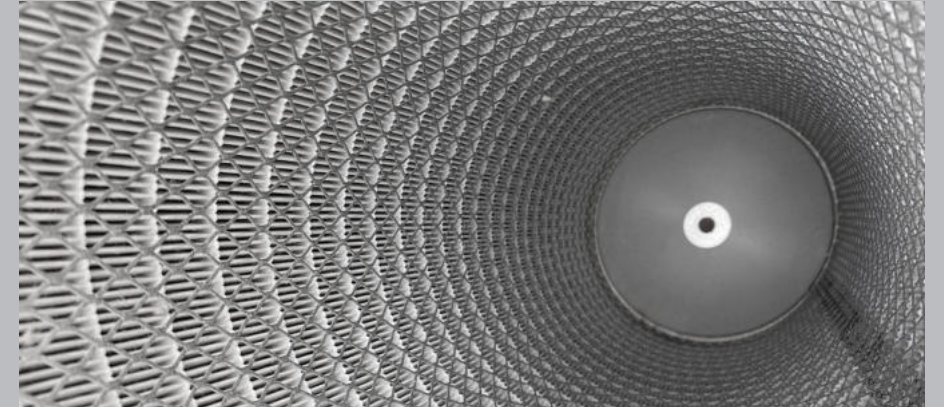

Opening the pleat for
this practical test re-
veals that the entire
media area is utilized!

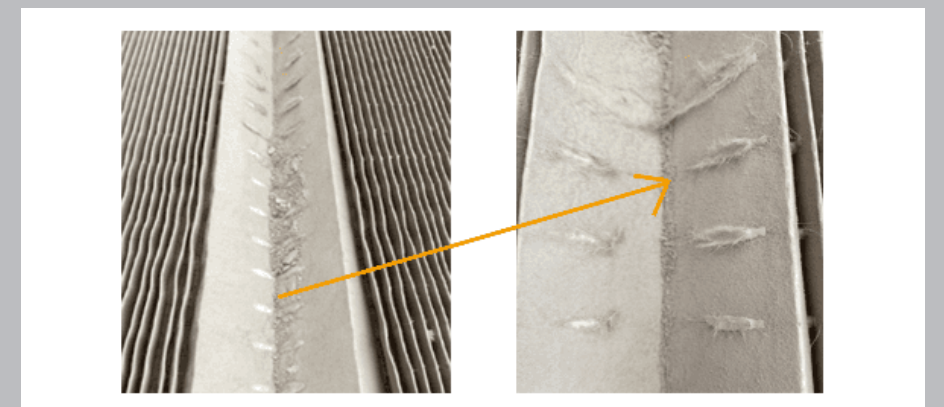

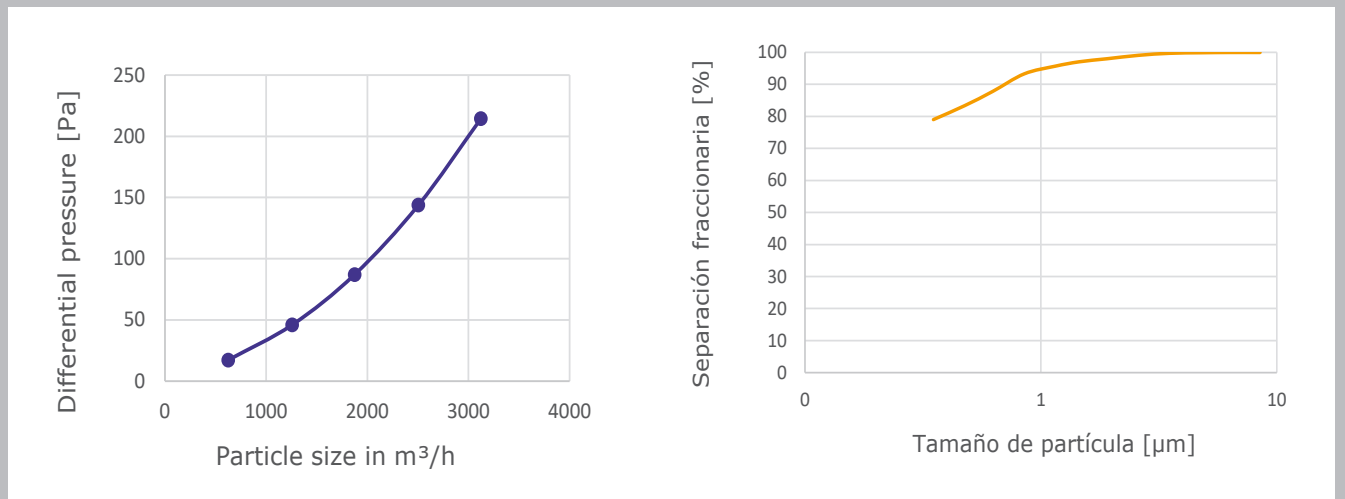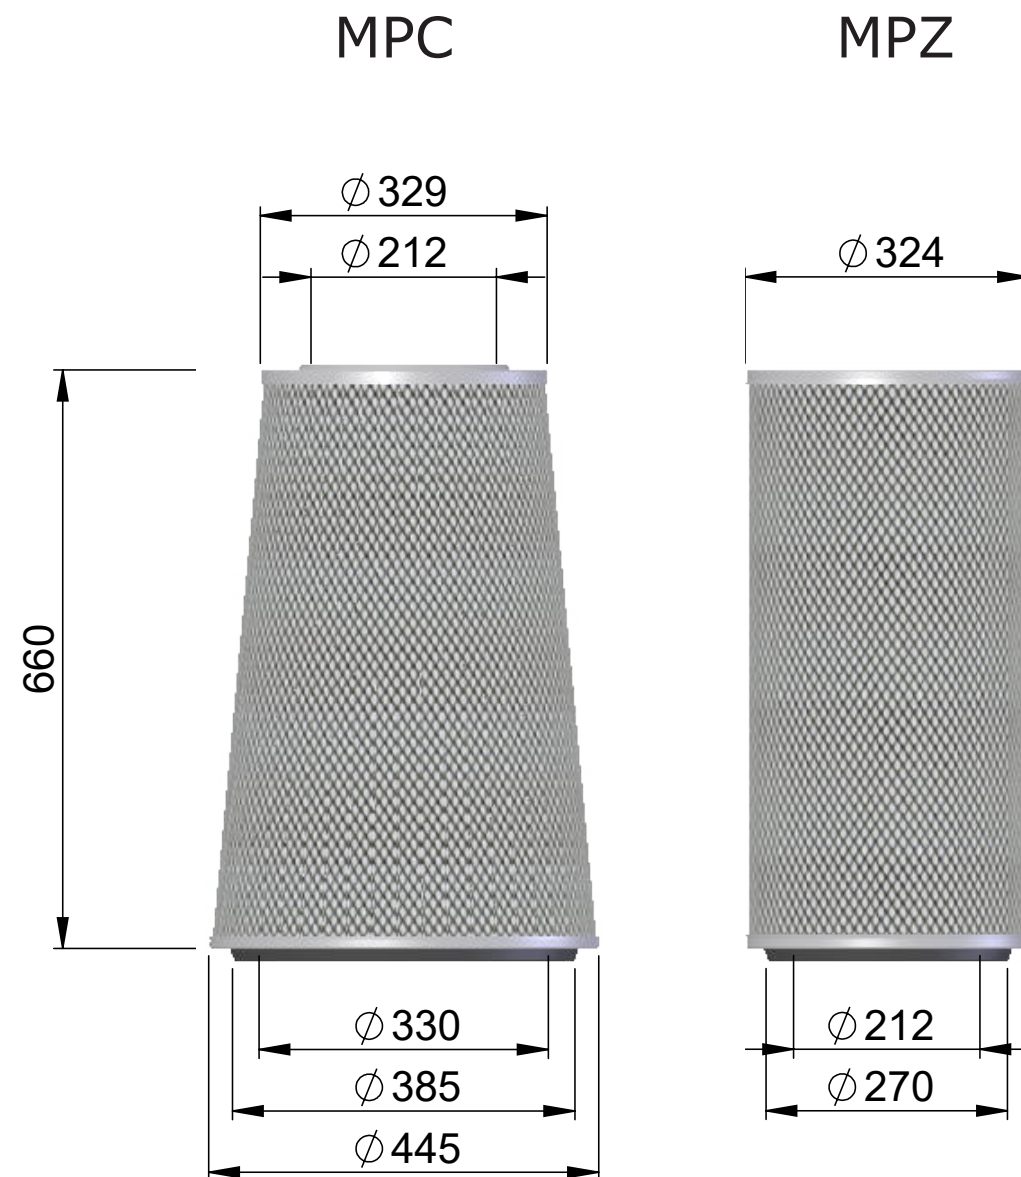

MPC & MPZ ECO-85 GTP (Conical & Cylindrical Set)

Filter Class acc. to ISO 29461	ISO T9
Nominal Air Flow Rate	2500 m³/h
Initial Pressure Drop	145 Pa

ⓘ All data from the diagrams refer to measured values of the entire filter.

MPC & MPZ Pure-T10 GTP (Conical & Cylindrical Set)







Filter Class acc. to ISO 29461	ISO T10
Nominal Air Flow Rate	2500 m ³ /h
Initial Pressure Drop	175 Pa

MPC & MPZ Pure-T11 GTP (Conical & Cylindrical Set)

Filter Class acc. to ISO 29461	ISO T11
Nominal Air Flow Rate	2500 m ³ /h
Initial Pressure Drop	195 Pa

MPC & MPZ Pure-E12 GTP (Conical & Cylindrical Set)

Filter Class acc. to EN 1822	E12
Nominal Air Flow Rate	2500 m ³ /h
Initial Pressure Drop	260 Pa

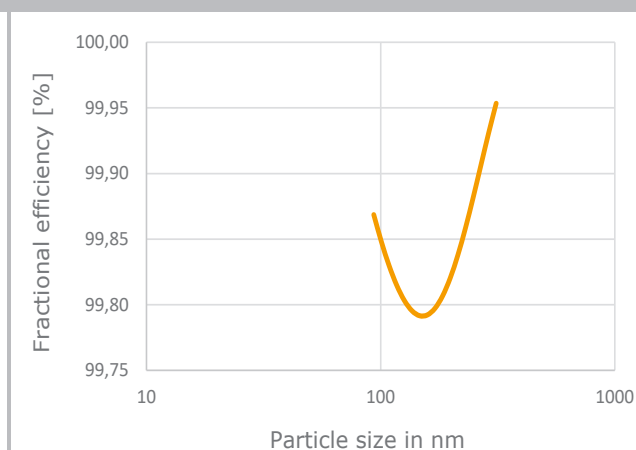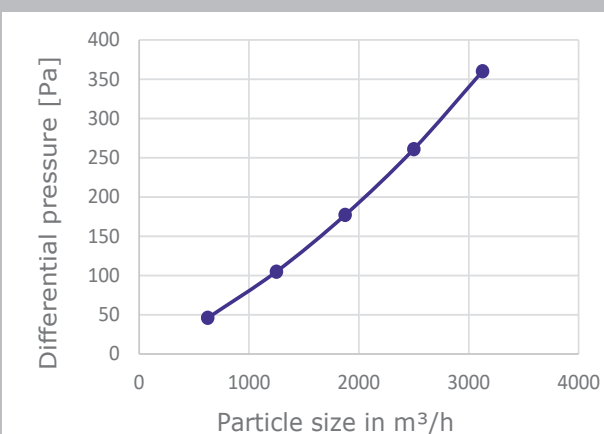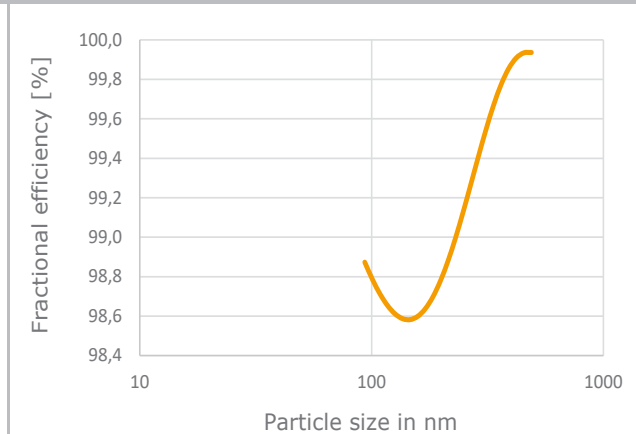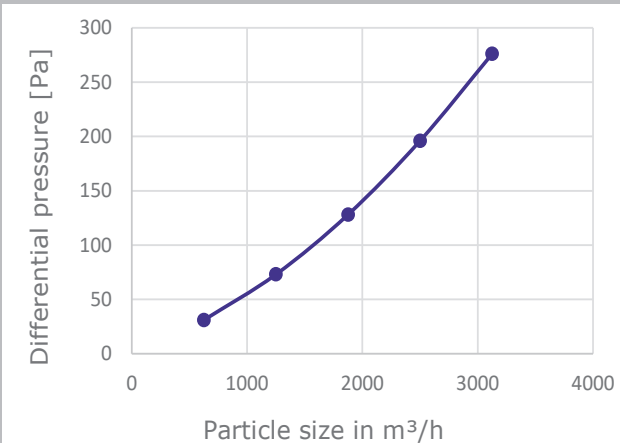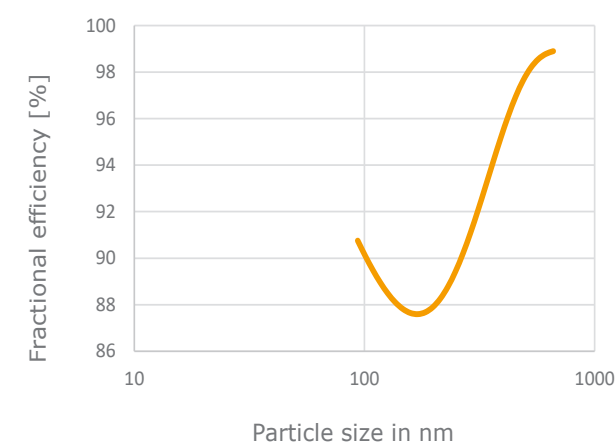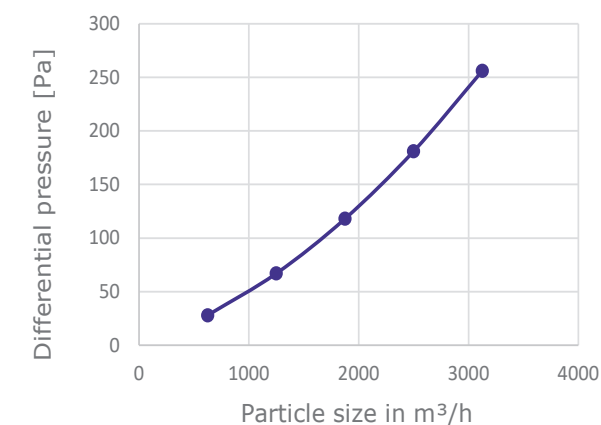

① All data from the diagrams refer to measured values of the entire filter.

The first **pulsable
prefilter media**
for an extended
filter service life!



More information about

PORET[®]
WRAP

